

Cochlear™ Baha® Systems

Baha candidacy guidelines

If your patients meet the criteria below, a Baha® demonstration can help determine if a surgical or non-surgical Baha System is right for them.



Mixed and conductive

**PTA BC
threshold
≤65dB HL**

(0.5, 1, 2, 3 kHz)




Single-sided deafness

**Poor ear
Non-
functional
hearing**

(i.e. profound
hearing loss)

**Good ear
PTA AC
threshold
≤20dB**

(0.5, 1, 2, 3 kHz)

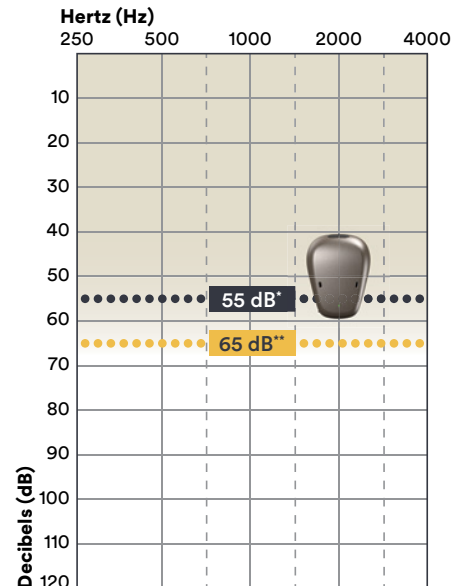

Contact your local Cochlear representative for more information on bone conduction solutions.

* Baha 6 Max Sound Processor has a fitting range of up to 55 dB SNHL.

** Additional powerful Baha device available. Contact your Cochlear representative for more information.



BUN277 ISS4 JUL21 ©2021 Cochlear Limited. All rights reserved. Trademarks and registered trademarks are the property of Cochlear Limited.